




CITEL



Type 1+2 AC surge protector - 3-phase+N

DS504E-320

- Type 1 + 2 multipolar AC surge protector
- Iimp total : 200 kA (10/350µs impulse)
- Imax : 200 kA (8/20µs impulse)
- Internal disconnections, status indicator and remote signaling
- Conforme NF EN 61643-11, IEC 61643-11, UL1449 ed.5

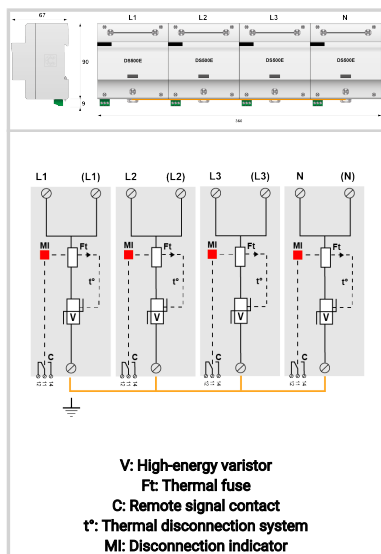

Electrical Characteristics

SPD type	IEC	1+2
Network		230/400V
AC system		TNS
Nominal line voltage	Un	230 Vac
Max. AC operating voltage	Uc	320 Vac
Max. load current		
if series connection	IL	100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Follow current	If	None
Nominal discharge current	In	50 kA
15 x 8/20 µs impulses		
Max. discharge current		
max. withstand @ 8/20 µs by pole	Imax	200 kA
Impulse current by pole		
max. withstand 10/350µs by pole	Iimp	50 kA
Total lightning current		
max. total withstand @ 10/350µs	Itotal	200 kA
Specific energy by pole		
max. withstand 10/350 µs	W/R	156 kJ/ohm
Connection mode(s)		L/PE and N/PE
Protection mode(s)		Common mode
Protection level N/PE	Up N/PE	1.8 kV
@ In (8/20µs)		
Protection level L/PE	Up L/PE	1.8 kV
@ In (8/20µs)		
Protection level N/PE at 5 kA	Up-5kA	1.2 kV
@ 5 kA (8/20µs)		
Residual voltage L/PE at 5 kA	Up-5kA	1.2 kV
@ 5 kA (8/20µs)		
Admissible short-circuit current	Iscrr	50 000 A

Mechanical Characteristics

Technology		MOV
SPD configuration		3-phase
Connection to Network		By screw terminals: 6-35mm² / by bus
Format		1-pole modular box assembled
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		2.68 kg

Disconnectors

Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses Type gG - 500 A

Standards

Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		

Part number

504320

