




- 2-poles surge protector 48 Vdc
- Type 1 and Type 2
- In 30 kA / I_{max} 70 kA
- Remote signaling
- I_{imp} 7 kA
- Pluggable Module
- IEC 61643-11 and EN61643-11 compliance



Electrical Characteristics

SPD type	IEC	1+2
Network		48 Vdc
Nominal line voltage	Un	48 Vdc
Nominal DC voltage	Un-dc	48 Vdc
Max. DC operating voltage	Uc	65 Vdc
Residual Current		
Leakage current to Ground	I _{pe}	< 0.2 mA
Follow current	I _f	None
Nominal discharge current		
15 x 8/20 µs impulses	I _n	30 kA
Max. discharge current		
max. withstand @ 8/20 µs by pole	I _{max}	70 kA
Impulse current by pole		
max. withstand 10/350µs by pole	I _{imp}	7 kA
Connection mode(s)		+/-PE or -/PE
Protection level		
@ I _n (8/20µs)	U _p	300 V

Mechanical Characteristics

Technology		MOV
SPD configuration		Single phase
Connection to Network		By screw terminals: 4-25mm ²
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		1 mechanical indicator
Spare module(s)		DSM70R-48DC
Remote signaling of disconnection		DS71RS-48DC option : output on changeover contact
Dimensions		See diagram

Disconnectors


Thermal disconnector		Internal
Back-up protection device		100 A min. - 125 A max. - Fuses type gG

Standards

Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
----------------------	--	--

Part number

322101

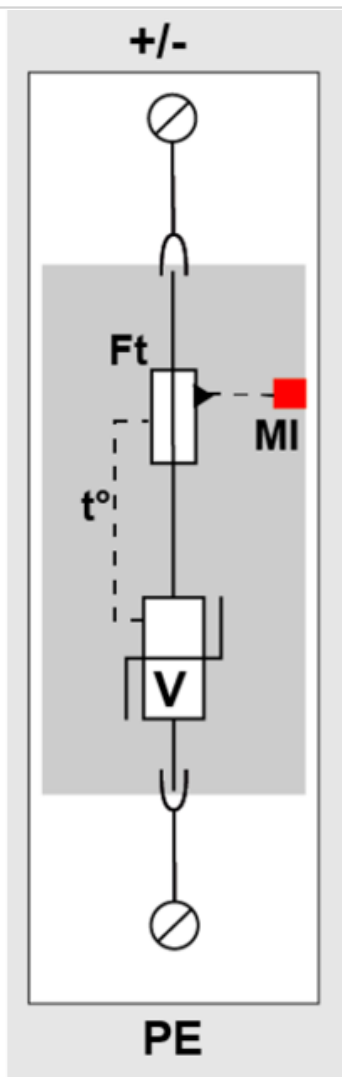

V: High-energy varistor
Ft: Thermal fuse
t°: Thermal disconnection system
MI: Disconnection indicator

