




CITEL



RJ45 surge protector for 1 ISDN line

MJ8-ISDN

- Telecom line surge protector
- ISDN line
- Instantaneous installation
- RJ45 connector
- UL497A

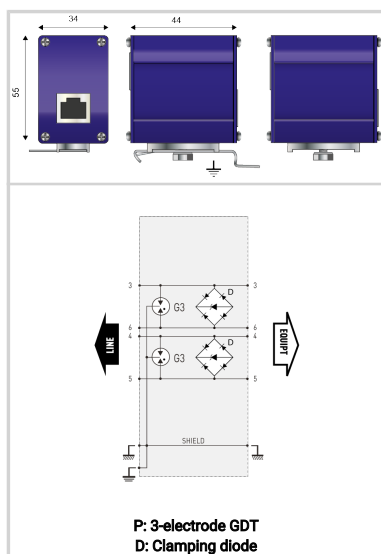

P: 3-electrode GDT
D: Clamping diode

Electrical Characteristics

Network		ISDN, 48 V line
Nominal line voltage	Un	48 Vdc
Max. DC operating voltage	Uc	60 Vdc
Max. frequency	f max.	> 10 MHz
Max. data rate		30 Mbps
Insertion loss		< 1 dB
Max. load current @25°C	IL	2 A
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	2000 A
Protection Level C3 (10/1000µs), 300 applications@10 A, Y-Y (Line/Line)	Up	70 V
Protection Level C3 (10/1000µs), 300 applications@10 A, Y-C (Line/Earth)	Up	70 V
Impulse current 2 x 10/350µs Test - D1 Category	Iimp	500 A
Line/Line Nominal discharge current C2 Category	In L/L	500 A

Mechanical Characteristics

Technology		GDT+TVS diode
SPD configuration		2-pairs+shielded
Connection to Network		RJ45 connector Female input/output
Format		Connector RJ45
Mounting		DIN rail / Wall / Plate
Accessory(s) provided		DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe
Housing material		Aluminium
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit - transmission cut-off
Pinout		2-pairs (3-6)(4-5)
Dimensions		See diagram
Weight		0.112 kg

Standards

Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
----------------------	--	-------------------------------------

Part number

560209

