




CITEL

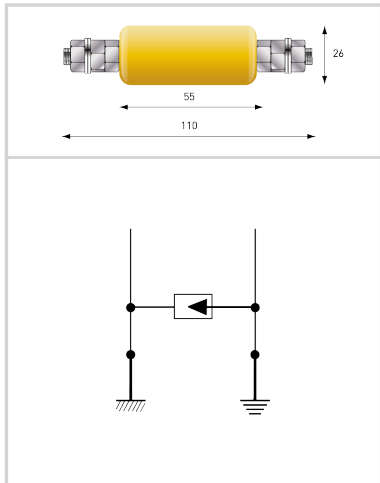

Isolating spark gap (ISG)

SGP70

- Isolating spark gap
- Indoor application
- Max. discharge current: 70 kA
- EN 50164-3, IEC 62561-3 compliance



Electrical Characteristics		
Rated DC withstand voltage	Uw DC	500 V
Rated AC withstand voltage	Uw AC	300 V
DC sparkover voltage (100V/s)		600-900 V
Follow current	If	Yes
Max. discharge current <i>max. withstand @ 8/20 µs by pole</i>	I _{max}	70 kA
Impulse current by pole <i>max. withstand 10/350µs by pole</i>	I _{imp}	25 kA
Classification following IEC 62561-3		1L
Insulation resistance	IR	1 Gohm
Rated impulse sparkover voltage <i>1kV/µs</i>	Ur I _{imp}	1500 V
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		Threaded rod M8
Operating temperature	Tu	-40/+85°C
Protection rating		IP54
Dimensions		See diagram
Weight		0.14 kg
Standards		
Standards compliance		EN 62561-3
Part number		
690103		

