





CITEL

2-pair Data surge protector unit

B280-24D3



- 2-pair surge protection unit
- 24 V
- Removable protection circuit
- Wall mounting and screw connection
- UL497 A&B

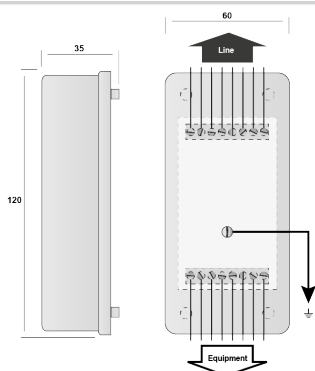

G: 3-electrode gas tube
R: Resistor
D3: 3-pole clamping diode

Electrical Characteristics

Network		4-20mA, Liaison 24V
Nominal line voltage	Un	24 V
Max. DC operating voltage	Uc	28 Vdc
Max. frequency	f max.	3 MHz
Insertion loss		< 1 dB
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax	20 kA
Protection mode(s)		Common/Differential mode
Protection Level C3 (10/1000 μ s), 300 applications@10 A, Y-Y (Line/Line)	Up	40 V
Protection Level C3 (10/1000 μ s), 300 applications@10 A, X-C (Line/Earth)	Up	20 V
Line resistance		< 4.7 Ohm

Mechanical Characteristics

Technology		GDT+TVS diode
SPD configuration		2 pairs
Connection to Network		By screw terminal: cross section 0.4-1.5mm ²
Format		Wall mounting box
Mounting		Wall mounting by screws (not supplied)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit - transmission cut-off - fault mode 2
Spare module(s)		S280-24D3
Dimensions		See diagram
Weight		0.122 kg

Standards

Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Certification		UL 497B

Part number

72773

