




CITEL

1-pole Type 1 and Type 2 SPD for 48 Vdc

DDC30S-10-85



- › Combined SPD Type 1+2 for DC supplies, 1-pole
- › Type 1 + 2
- › In: 20 kA / I_{max}: 30 kA
- › I_{imp}: 4kA
- › Pluggable module
- › Remote signaling
- › prIEC 61643-41 compliance

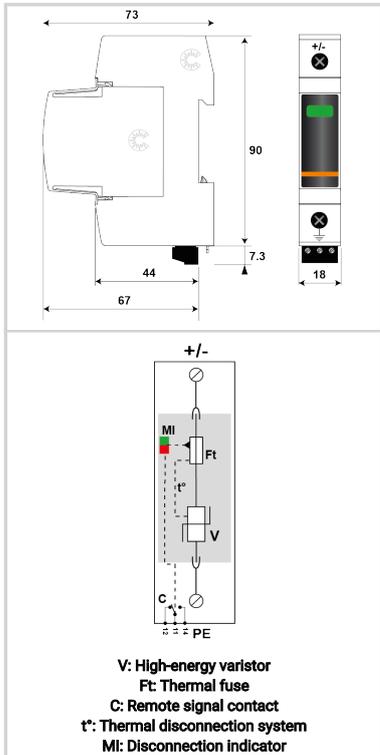

Electrical Characteristics		
SPD type	IEC	1+2
Nominal DC voltage	Un-dc	75 Vdc
Max. AC operating voltage	Uc	60 Vac
Max. DC operating voltage	Uc	85 Vdc
Residual Current <i>Leakage current to Ground</i>	I _{pe}	< 0.2 mA
Follow current	I _f	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	20 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	30 kA
Impulse current by pole <i>max. withstand 10/350μs by pole</i>	I _{imp}	4 kA
Connection mode(s)		+/PE or -/PE
Protection level +/-PE (-/PE) <i>@ I_n (8/20μs)</i>	U _p	390 V / -
Admissible short-circuit current	I _{sc}	50 000 A
Mechanical Characteristics		
Technology		MOV
SPD configuration		Single phase
Connection to Network		Srew terminals: 2.5-25mm ² +/-: 1.5-10mm ²
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		1 mechanical indicator - Red/Green
Spare module(s)		MDDC30-85
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram - 1TE (EN43880)
Weight		0.070 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		50 A min. - 125 A max. - Fuses Type gG
Standards		
Standards compliance		prIEC 61643-41
Part number		
828110221		

