






CITEL

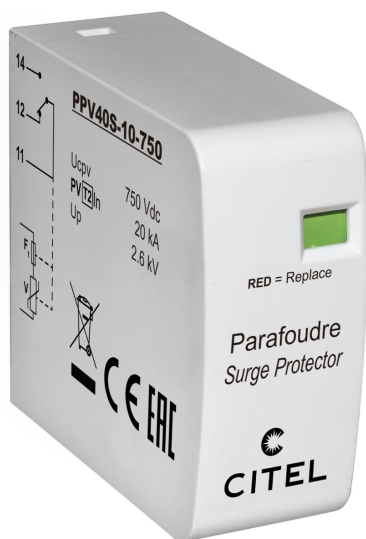

Type 2 PV Surge Protector for PCB mounting

PPV40S-10-750

- Type 2 surge protector for Photovoltaic
- PCB mounting
- I_{max}: 25 kA
- Remote signaling
- EN 50539-11 and IEC 61643-31 compliance*

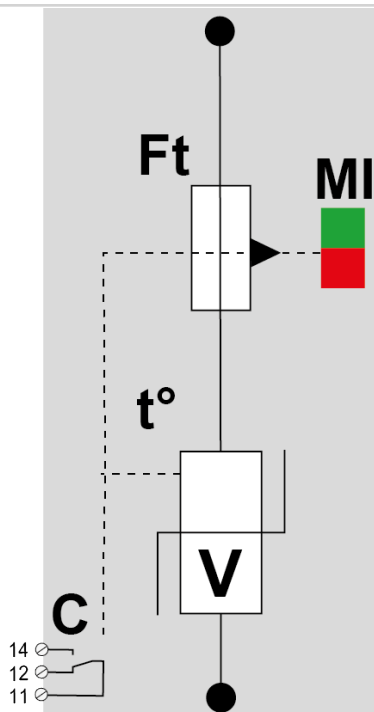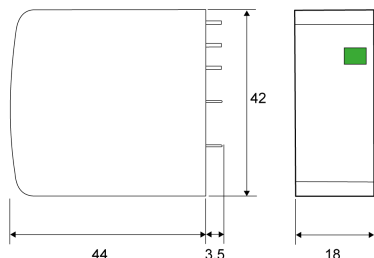

V: High-energy varistor
Ft: Thermal fuse
C: Remote signal contact
t°: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics

SPD type	IEC	2
Max. PV operating voltage	Ucpv	750 Vdc
Max. PV operating voltage (star mounting)	Ucpv	1500 Vdc
PV Permanent Operating current	Icpv	< 0.1 mA
Current consumption at Ucpv	Icpv	< 0.1 mA
Nominal discharge current	In	20 kA
15 x 8/20 μ s impulses		
Max. discharge current	I _{max}	40 kA
max. withstand @ 8/20 μ s by pole		
Current withstand short circuit PV	Iscpv	15 000 A
Protection level	Up	2.6 kV
@ In (8/20 μ s)		
Protection level (star mounting)	Up	5.2 kV
(+/-) / (+/PE or -/PE) @ In (8/20 μ s)		

Mechanical Characteristics

Technology	MOV
Connection to Network	Through soldering pins
Mounting	On Printed Circuit Board
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Disconnection indicator	1 mechanical indicator
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.065 kg

Disconnectors

Thermal disconnector	Internal
Back-up protection device	Without

Standards

Standards compliance	IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.
----------------------	---

Part number

8722205

