



PPV1-6S-10-750

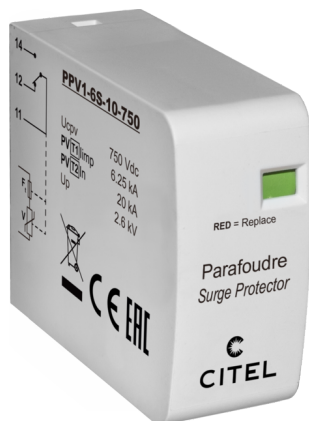

- ✦ Type 1+2 surge protector for Photovoltaic
- ✦ PCB mounting
- ✦ Iimp : 6.25 kA (10/350 µs)
- ✦ Remote signaling
- ✦ EN 50539-11 and IEC 61643-31 compliance*



Electrical Characteristics

SPD type	IEC	1+2
Max. PV operating voltage	Ucpv	750 Vdc
Max. PV operating voltage (star mounting)	Ucpv	1500 Vdc
PV Permanent Operating current	Icpv	< 0.1 mA
Nominal discharge current 15 x 8/20 µs impulses	In	20 kA
Impulse current by pole max. withstand 10/350µs by pole	Iimp	6.25 kA
Current withstand short circuit PV	Iscpv	15 000 A
Protection level @ In (8/20µs)	Up	2.6 kV
Protection level (star mounting) (+/-) / (+/PE or -/PE) @ In (8/20µs)	Up	5.2 kV

Mechanical Characteristics

Connection to Network	Through soldering pins
Mounting	On Printed Circuit Board
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Disconnection indicator	Mechanical indicator
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.119 kg

Disconnectors


Thermal disconnector	Internal
Back-up protection device	Without

Standards

Standards compliance	IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV/PAC series are components. Compliant when combined is an assembly.
----------------------	--

Part number

8723205

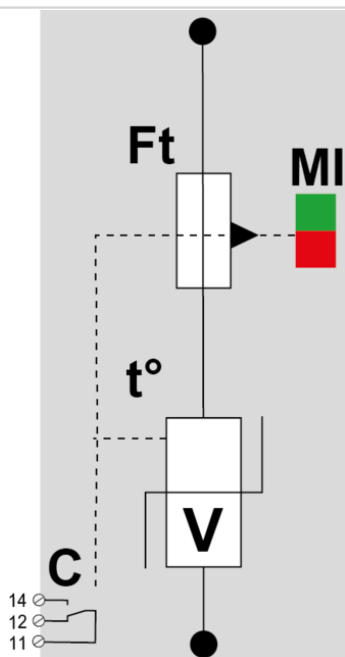

V: High-energy varistor
Ft: Thermal fuse
C: Remote signal contact
t°: Thermal disconnection system
MI: Disconnection indicator