





# CITEL

## Type 2 PV Surge Protector for PCB mounting

### PPV40S-10-900

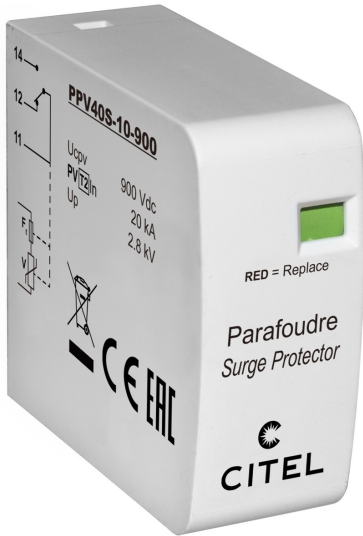

- Type 2 surge protector for Photovoltaic
- PCB mounting
- I<sub>max</sub>: 25 kA
- Remote signaling
- EN 50539-11 and IEC 61643-31 compliance\*

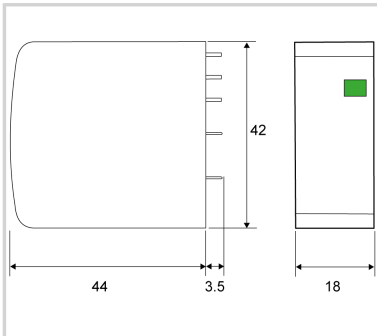

#### Electrical Characteristics

SPD type	IEC	2
Max. PV operating voltage	Ucpv	900 Vdc
Max. PV operating voltage (star mounting)	Ucpv	1800 Vdc
PV Permanent Operating current Current consumption at Ucpv	Icpv	< 0.1 mA
Nominal discharge current 15 x 8/20 μs impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	40 kA
Current withstand short circuit PV	Iscpv	15 000 A
Protection level @ In (8/20μs)	Up	2.8 kV
Protection level (star mounting) (+/-) / (+/PE or -/PE) @ In (8/20μs)	Up	5.6 kV

#### Mechanical Characteristics

Technology	MOV
Connection to Network	Through soldering pins
Mounting	On Printed Circuit Board
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Disconnection indicator	1 mechanical indicator
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.072 kg

#### Disconnectors

Thermal disconnector	Internal
Back-up protection device	Without

#### Standards

Standards compliance	IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.
----------------------	---

#### Part number

8722206

