




CITEL

Smart SPD Monitoring Device

LSCM-D/230AC/P1000



- Lightning and Surge Current Counter & SPD monitoring device
- Wide surge current detection range:
 - 1/100 kA @8/20 μ s
 - 1/50 kA @10/350 μ s
- Front display for access to recorded events and device parameters
- Peak current and time stamping recording of the surge currents
- RS485 communication interface / MODBUS protocol
- Monitoring features : 2 inputs (SPD or disconnector status) / 1 output
- IEC 62561-6 compliance

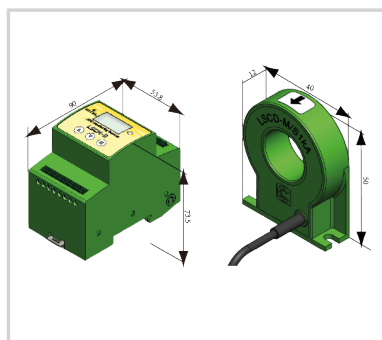

Electrical Characteristics		
Max. AC operating voltage	Uc	230 Vac
Max. AC operating voltage	Uc	230 Vac
Connection mode(s)		2 connection PE ports
Minimum current sensibility	I _{tc}	1000A
Max. admissible impulse current	I _{mcw}	100 kA (8/20 μ s) / 50 kA (10/350 μ s)
Mechanical Characteristics		
Wiring		Connection wire sensor : Coaxial-cable AWG26
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating and storage temperature		-20/+60°C / -25 /+70°C
Connection		• Counter : Spring-cage terminals • Sensor : Plug-in (1 sensor line port)
Remote signaling of disconnection		Two channel to input switching signal and one channel of output switching signal
Display		128*64 lattice OLED display, green/red status LED display
Dimensions		See diagram
Weight		0.216 kg
Standards		
Standards compliance		EN 62561-6
Part number		
793534		

