





CITEL

Type 1+2+3 AC surge protector - 3-phase+N

DACN1-35VGS-40-440

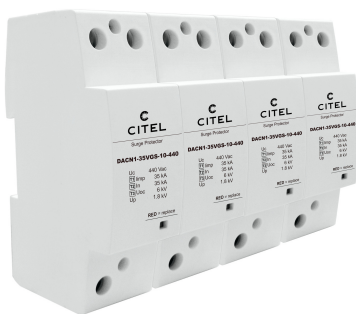

- Type 1+2+3 AC surge protector
- VG Technology
- In: 35 kA
- Iimp: 35 kA on 10/350µs impulse
- No leakage current
- Unpluggable module for each phase
- Remote signaling
- Optimized to TOV
- EN 61643-11, IEC 61643-11 complied

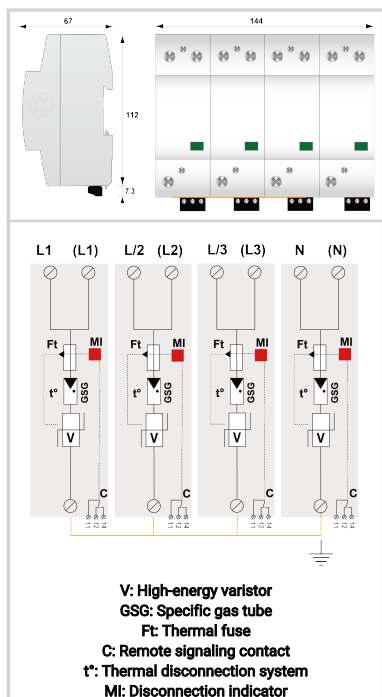

Electrical Characteristics		
SPD type	IEC	1+2+3
AC system		TNS-IT
Max. AC operating voltage	Uc	440 Vac
Max. load current @25°C	IL	100 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT	580 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT	770 Vac disconnection
Residual Current <i>Leakage current to Ground</i>	Ipe	None
Follow current	If	None
Nominal discharge current <i>15 x 8/20 µs impulses</i>	In	35 kA
Max. discharge current <i>max. withstand @ 8/20 µs by pole</i>	I _{max}	70 kA
Impulse current by pole <i>max. withstand 10/350µs by pole</i>	I _{imp}	35 kA
Withstand on Combination waveform IEC 61643-11 <i>Class III test: 1.2/50µs - 8/20µs</i>	Uoc	6 kV
Specific energy by pole <i>max. withstand 10/350 µs</i>	W/R	306 kJ/o
Protection level <i>@ In (8/20µs) and @ 6 kV (1,2/50 µs)</i>	Up	1.8 kV
Admissible short-circuit current	Iscrr	50 000 A
Mechanical Characteristics		
Technology		VG Technology (MOV+GSG)
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 6-35mm² / by bus
Format		1-pole modular box assembled
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Remote signaling of disconnection		Output on changeover contact
Wiring for remote signaling		1.5 mm² max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 8TE (EN43880)
Weight		1.652 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 400 A
Standards		
Standards compliance		EN 61643-11 / IEC 61643-11
Certification		
Part number		
29324022		

