




CITEL

Screw terminal for 'V' connection

DDT16



- › 'V' connection screw terminal for SPD
- › Improved connection for better efficiency
- › 2 x 35 mm² wire connection
- › Adapted to DAC/DDC surge protectors

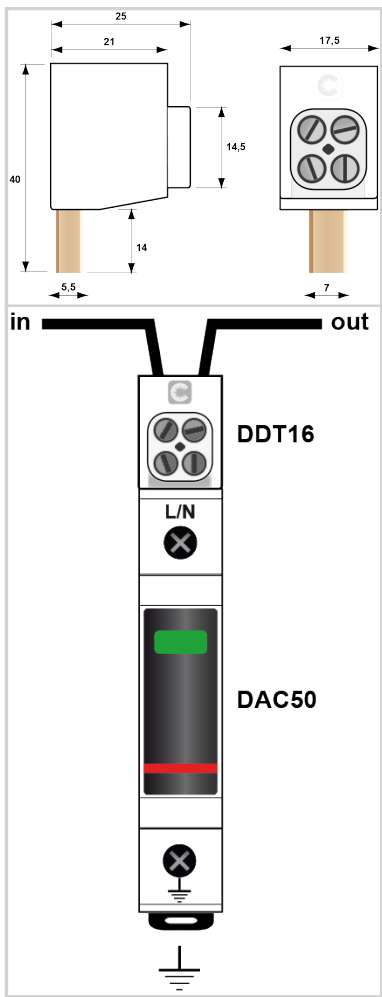

Electrical Characteristics		
Max. AC operating voltage	Uc	1000 Vac
Max. DC operating voltage	Uc	1500 Vdc
Max. load current @25°C	IL	100 A
Mechanical Characteristics		
Mounting		On DAC/DDC range terminal
Housing material		Polycarbonate UL94 V-0
Ingress Protection rating		IP00
Dimensions		See diagram
Contacts		Brass
Mini-max. cross section		2.5 - 25 mm² (12-4 AWG), solid, stranded & flexible
Weight		0.042 kg
Standards		
Standards compliance		UL1059
Part number		
400132		

