




CITEL

Outdoor 10 Gigabit POE++ Surge Protective Device - Metallic housing and plastic cable glands

LAN-10G-POE-CRPS



- ▶ POE++ Compatible (IEEE 802.3bt)
- ▶ 10Gb (5-100m) with Cat6A S/FTP cabling
- ▶ Shielded RJ45 connectors
- ▶ Outdoor applications, IP67 (NEMA 6)
- ▶ Plastic enclosure
- ▶ Conforms to IEC/EN 61643-21
- ▶ SPD categories D1, C3, C2, C1
- ▶ 16kA total surge discharge capability

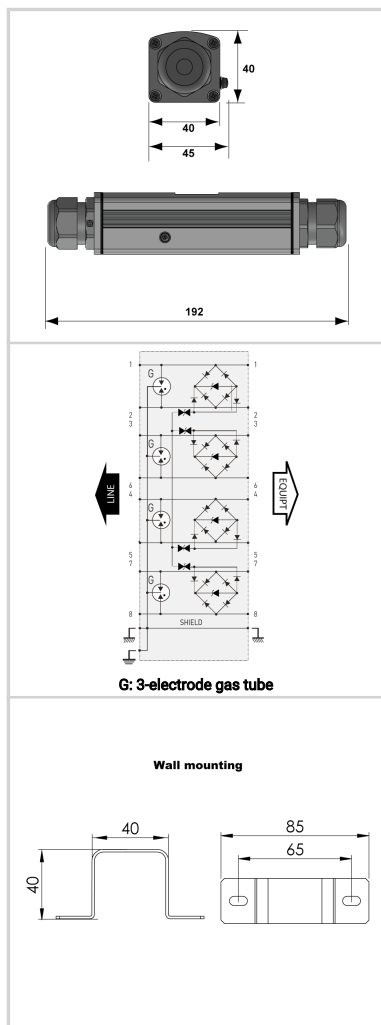

Electrical Characteristics		
Network		10Gb/s on Cat6A S/FTP cabling
Protection modes (network)		CM / DM
Protection modes (POE)		CM / DM (common mode / differential mode)
Transmission standard		IEEE 802.3bt
Lightning Protection Zones (LPZ)		0 - 3
Max. operating voltage (DATA)	Uc	3.3 Vdc
Max. operating voltage (POE)	Uc	60 Vdc
Max. frequency, in the channel	f max.	500 MHz
Max. data rate		10 Gbps
Max. load current @25°C	IL	2 A
Max. POE power (4PPOE)		100 W
Nominal discharge current C1 (1.2/50 μ s / 8/20 μ s), 300 applications X-X (Line/Line)	In	300V / 150A
Nominal discharge current C1 (1.2/50 μ s / 8/20 μ s), 300 applications, X-C (Pair-Pair, POE)	In	300V / 150A
Nominal discharge current C2 (1.2/50 μ s / 8/20 μ s), 10 applications X-C (Line/Earth)	In	4 kV / 2 kA
Max. discharge current max. withstand @ 8/20 μ s, X-C (Line/Earth)	Imax	2 kA
Max. discharge current max. withstand @ 8/20 μ s, 8X-C (1&2&3&4&5&6&7&8 to Earth)	Imax Total	16 kA
Protection Level C3 (10/1000 μ s), 300 applications@10 A, Y-Y (Line/Line)	Up	< 10 V
Protection Level C2 (1.2/50 μ s / 8/20 μ s), 10 applications, Y-C (Line/Earth)	Up	< 1000 V
Protection Level C3 (10/1000 μ s), 300 applications @ 10A, (Pair-Pair, POE)	Up	< 80 V
Protection Level C3 (10/1000 μ s), 300 applications@10 A, Y-C (Line/Earth)	Up	< 700 V
Protection Level C1 (1.2/50 μ s & 8/20 μ s), 300 applications, (Pair-Pair, POE)	Up	< 98 V
Impulse current D1 (10/350 μ s), 2 applications, X-C (Line/Earth)	Iimp	500 A
Line resistance ($\pm$ 10%)		$\sim$ 0 ohms
Capacitance @1MHz, X-C (Line/Earth)	C	< 5 pF
Mechanical Characteristics		
Technology		GDT+TVS diode
SPD configuration		8 wires+shielded
Connection to Network		RJ45 shielded connectors input/output
Cable glands		Plastic/Rubber
Format		Metallic box with connectors input/output
Mounting		Wall / Pole / Plate
Accessory(s) provided		U' bracket
Operating temperature	Tu	-40/+85°C
Ingress Protection rating		IP67 (NEMA 6)
Failsafe mode		Transmission cut-off - Fault mode 2 (short-circuit)
Pinout		(1-2)(3-6)(4-5)(7-8)
Dimensions		See diagram
Weight		0.65 kg / 1.44 lbs
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B / IEEE 802.3af/3at/3bt, ANSI/TIA-568-c.1
Environmental standards		EU RoHS
Part number		
581546		

