




CITEL



Compact Type 2+3 hard wired surge protector

MSB10-400(UL)

- ▶ Compact type 2 + 3 surge protector
- ▶ Wall mounting and hard wired connection
- ▶ Status indicators
- ▶ IP66
- ▶ UL1449 ed.5 certified
- ▶ EN 61643-11, IEC 61643-11 compliant

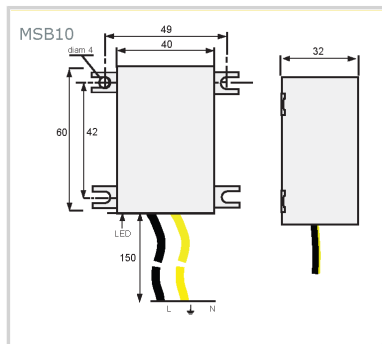

Electrical Characteristics		
Network		230/400V
AC system		TT-TN
Nominal line voltage	Un	230 V
Max. AC operating voltage	Uc	300 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Follow current	If	None
Nominal discharge current 15 x 8/20 μ s impulses	In	3 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax	10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 μ s - 8/20 μ s	Uoc	6 kV
Withstand on overvoltages IEEE C62.41.1		10 kV / 10 kA
Protection mode(s)		Common/Differential mode
Protection level L/N @ In (8/20 μ s)	Up L/N	1.2 kV
Protection level L/PE @ In (8/20 μ s)	Up L/PE	1.2 kV
Admissible short-circuit current	Iscrr	10 000 A
Mechanical Characteristics		
Connection to Network		Wires
Mounting		Wall or plate
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP66
Failsafe mode		Disconnection from AC network
Disconnection indicator		Green LED OFF
Operating indicator		Green Led ON
Weight		0.116 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Standards		
Certification		UL
Environmental standards		EU RoHS
Part number		
561501		

