




CITEL

Type 2 PV Surge Protector for PCB mounting

PPV25S-10-600

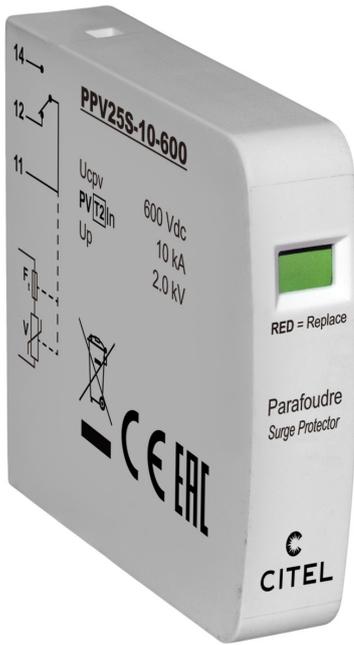

- Type 2 surge protector for Photovoltaic
- PCB mounting
- I_{max}: 25 kA
- Remote signaling
- EN 50539-11 and IEC 61643-31 compliance*



Electrical Characteristics

SPD type	IEC	2
Max. PV operating voltage	U _{cpv}	600 Vdc
Max. PV operating voltage (star mounting)	U _{cpv}	1200 Vdc
PV Permanent Operating current Current consumption at U _{cpv}	I _{cpv}	< 0.1 mA
Nominal discharge current 15 x 8/20 μs impulses	I _n	10 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	25 kA
Current withstand short circuit PV	I _{scpv}	15 000 A
Protection level @ I _n (8/20 μs)	U _p	2 kV
Protection level (star mounting) (+/-) / (+/PE or -/PE) @ I _n (8/20 μs)	U _p	4 kV

Mechanical Characteristics

Technology	MOV
Connection to Network	Through soldering pins
Mounting	On Printed Circuit Board
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Disconnection indicator	1 mechanical indicator
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.041 kg

Disconnectors

Thermal disconnector	Internal
Back-up protection device	Without

Standards

Standards compliance	IEC 61643-31 / EN 50539-11 *The standard cover devices. PPV /PAC series are components. Compliant when combined is an assembly.
----------------------	---------------------------------------------------------------------------------------------------------------------------------

Part number

8721203

